



OPTIONS



Logo

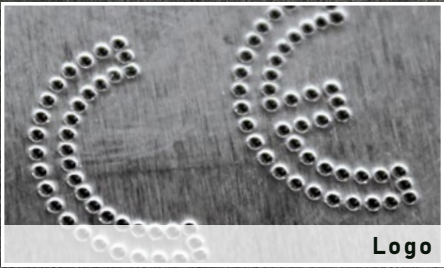


Line

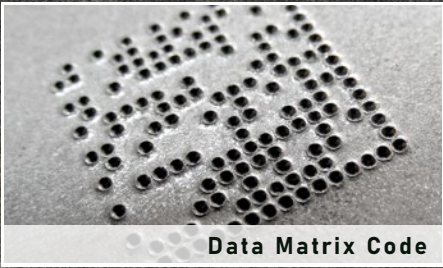


Data Matrix Code


TREATMENTS

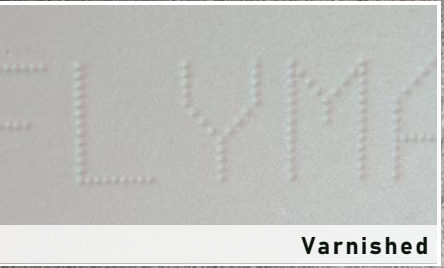


Varnished

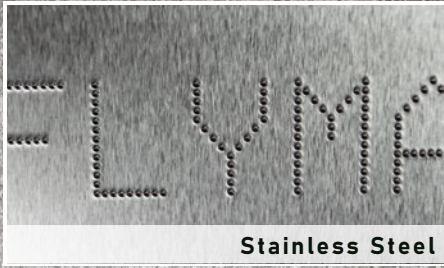

Stainless Steel

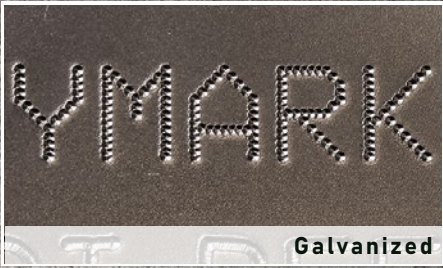


Galvanized

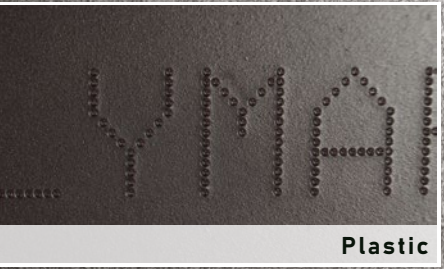

Plastic



Hardened Steel

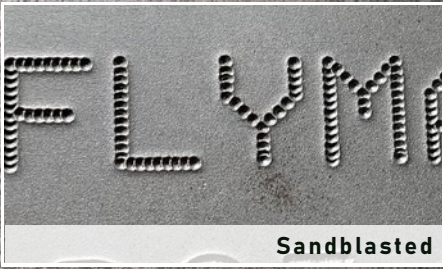

Sandblasted



MARKATOR® Manfred Borries GmbH  
Bunsenstraße 15  
71642 Ludwigsburg  
Germany

Phone: +49 (0) 7144 - 8575 - 0  
Telefax: +49 (0) 7144 - 8575 - 600

info@markator.de  
www.markator.de

Discover our mobil FlyMarker® mini series



- Attractive price-performance ratio
- 18V Lithium-Ion-Battery
- Various Marking areas



[www.flymarker.com.sg](http://www.flymarker.com.sg)



Electromagnetic Benchtop Marker  
FlyMarker® **mini** 120/100 STATION

Version 2.0 | All information subject to correction. Images similar. Images may contain optional accessories.



### Benefits at a glance

- Integrated controller (All-In-One)
- Attractive price-performance ratio
- High quality guide system for highest stability
- Pollution-protected electronics
- Drag chain guided electric cables
- Laser pointer for simulating the marking process
- Electromagnetic pin drive

### Capacitive touchscreen

### Mark permanently and forgery-proof

- Visible marking even after subsequent surface treatment.
- Nearly all materials can be marked – from plastics up to hardened steel (63HRC).
- Adjustable impact strength for different materials.

### Rocker arm for quick component change

### Fast and smooth navigation

- Latest processor generation.
- Clear and intuitive software.
- Numerous language versions available by default.
- Practical preview function.
- Helpful tagging variables such as time, date or auto numbering are already included.

### Switchable LED lighting

### Core technology

- High marking quality thanks to stable, durable mechanics.
- Double guided linear guides in X and Y direction for distortion-free, multi-line markings without loss of quality.
- High quality guide system for highest stability.

### TECHNICAL SPECIFICATIONS

**Marking area (x/y)**  
120 x 100 mm

**Available character heights**  
1,0 to 99,9 mm

**Fonts**  
Medium spaced lettering similar to DIN 1451  
in single dot characters (size 5 x 7 or 9 x 13)

**Drive of the marking pin**  
Electromagnetic

**Available characters**  
Numbers 0 - 9, capital letters / small letters A - Z; a - z  
various punctuation marks. , / etc.

**Interface**  
4x USB-A, 1x Ethernet

**Height tolerance compensation**  
Up to max. 5 mm (constant marking depth also on  
uneven surfaces)


**Marking force**  
30 possible force settings

#### Delivery

- FlyMarker® mini 120/100 STATION
- Power supply
- Gauge assist for needle
- Operating manual



Available without touchscreen  
Input via USB keyboard

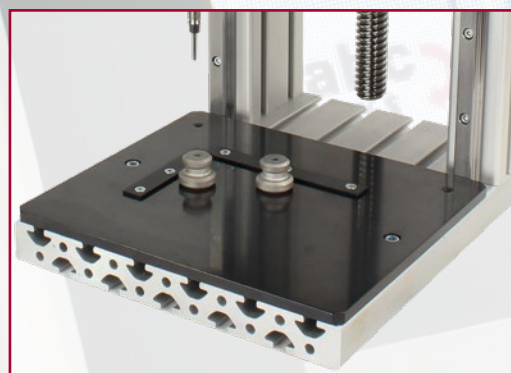

Type-plate with fix stop limit bars (optional)



Column frame with handwheel (optional)