



OPTIONS



Logo

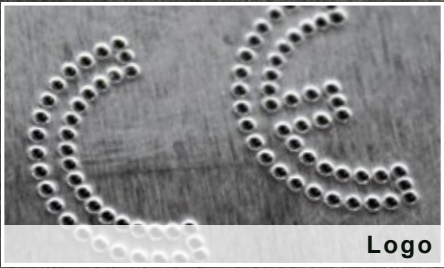

Line

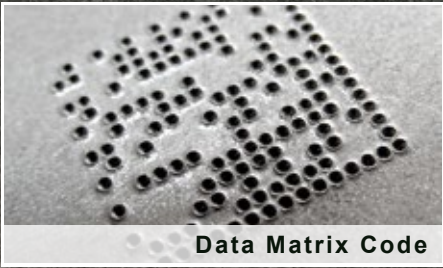

Data Matrix Code


TREATMENTS



Varnished



Stainless Steel

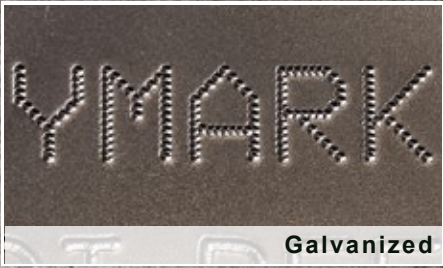


Galvanized



Plastic



Hardened Steel

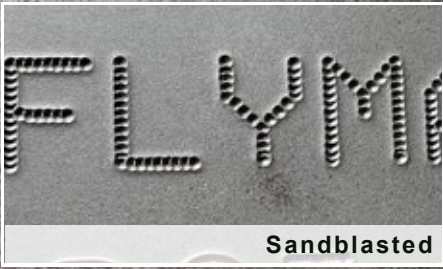

Sandblasted



MARKATOR® Manfred Borries GmbH
Bunsenstraße 15
71642 Ludwigsburg
Germany

Phone: +49 (0) 7144 - 8575 - 0
Fax: +49 (0) 7144 - 8575 - 600

info@markator.de
www.markator.de

www.flymarker.us



Battery Operated Hand-Held Marking System
FlyMarker® **mini** 65/30

Discover our all-rounder FlyMarker® mini 120/45



- Only 3,2 kg (incl. battery)
- Attractive price-performance ratio
- Marking area 120 mm x 45 mm



Version 2.0 | All information subject to correction. Images similar. Images may contain optional accessories.

Benefits at a glance

- Attractive price-performance ratio
- Integrated controller (All-In-One)
- Integrated user friendly keyboard mat with numeric keys
- Switchable LED lighting of the marking field
- Pollution-protected electronics
- Drag chain guided electric cables
- Protected interfaces
- One or two-handed operation

Weighs only 2,4 kg (incl. battery)

100 % mobil marking

- Ergonomic device design for energy-saving, non-tiring work.
- Heavy and immovable components are marked on site.
- Self-sufficient work without power and compressed air cables.
- Reduction of occupational accidents due to conventional stroke rate.

Also available as Wi-Fi and Touch



Removable handle



Integrated Barcode Scanner (optional)



18V Lithium-Ion-Battery

Fast and smooth navigation

- Latest processor generation
- Clear and intuitive software.
- Numerous language versions available by default.
- Practical preview function for error prevention.
- Helpful tagging variables such as time, date or auto numbering are already included.
- Individual company logos, quality marks or Data Matrix Codes are optional.

Break-resistant and glass-fiber reinforced plastic

Mark permanently and forgery-proof

- Visible marking even after subsequent surface treatment.
- Nearly all materials can be marked – from plastics up to hardened steel (63HRC).
- Adjustable magnet for different materials.

Core technology

- High marking quality thanks to stable, durable mechanics.
- Double guided ruler guides in X and Y direction for distortion-free, multi-line markings without loss of quality.
- High rigidity of the mechanics due to robust basic carrier with integrated setting angle.



Column frame for small parts (optional)

TECHNICAL SPECIFICATIONS

Marking area (x/y)

65 x 30 mm

Available character heights

1,0 to 29,9 mm

Fonts

Medium spaced lettering similar to DIN 1451
in single dot characters (size 5 x 7 or 9 x 13)

Drive of the marking pin

Electromagnetic

Available characters

Numbers 0 - 9, capital letters / small letters A - Z; a-z
various punctuation marks. , / etc.

Interface

USB-A, USB-B, Ethernet

Height tolerance compensation

Up to max. 5 mm (constant marking depth also on
uneven surfaces)

Weight

2,4 kg incl. battery

Battery capacity

2,0 Ah 18V (Lithium-Ion)
5,2 Ah 18V (optional)

Marking force

30 possible force settings
(constant impact performance through the complete
battery runtime)

Delivery

- Marking System FlyMarker® mini 65/30
- 2x battery 18V/2,0 Ah
- 1x charger
- Prism stop
- Carrying case
- Adjustment tools
- Operating manual